

Sound Master

www.soundmaster-es.com



Product Description

Product Name	Public Address Professional Amplifier (LPA-380TF)
Material	Aluminum Alloy
Function	Play Music/Video
Package	Box/Carton
Application	Public Address System
Rated Power	380W
Color	Black
Voltage	70-100V
Single package size:	49X37X10 cm
Single gross weight:	14.000 kg

- Product performance description**

1. U disk SD card plug and play, with remote control, radio, Blue tooth receiver module. 3 microphone inputs, 2 AUX inputs, 1 AUX output 2.100V, 70V constant voltage output and 4-16 ohm constant resistance output 3.5-unit LED indicator, with wiping function, easy to insert emergency broadcast, output short circuit protection and alarm, overheating and saturation distortion warning 4. Four-zone output. Independent volume control in each area, 2U standard chassis design, aluminum alloy panel, beautiful and practical

Sound Master


www.soundmaster-es.com

Sound System (PA SYSTEM)

LPA-380TF Mixing Amplifier



PA microphone
LTH-203

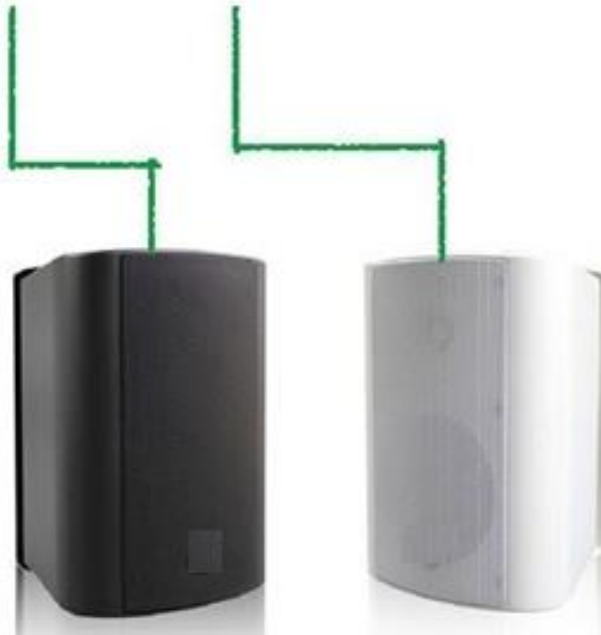

LBG-5084
20w wall speaker

remark:
IPC per 25 square meter.


Sound Master

www.soundmaster-es.com

Pre-amplifier with 4 Zone+FM+USB+MMC+Wirless contronal+ bluetooth+individual volume contronal

Features:


- 1: Bluetooth receiver module, usb plug seeding.
- 2: AUX input microphone input 3 road, 2 road, 1 road AUX output.
- 3: The output voltage 100 v, 70 v output, and 4-16 Ω resistance 5 unit LED display.
- 4: Output short circuit protection and alarm, overheating protection and alarm.
- 5: Each independent channel volume control, high and low control.

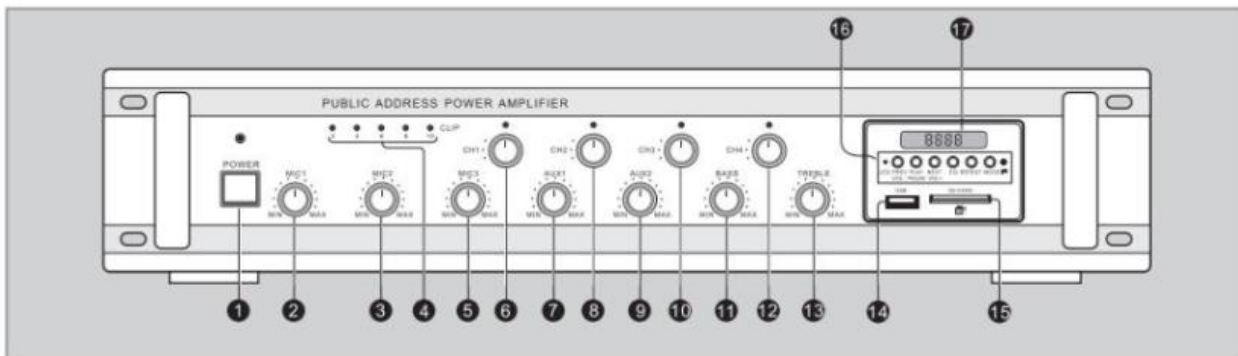

- 1 Power Switch 2 MIC1 Volume Adjustment 3 MIC2 Volume Adjustment 4 LED Display 5 MIC3 Volume Adjustment
6 Partition indicator light/Partition volume 7 AUX1 Volume Adjustment 8 Partition indicator light/Partition volume
9 AUX2 Volume Adjustment 10 Partition indicator light/Partition volume 11 BASS tuning
12 Partition indicator light/Partition volume 13 TREBLE tuning 14 USB disk Input 15 SD Input
16 FM/SD/USB Control 17 LCD Display

Sound Master

www.soundmaster-es.com

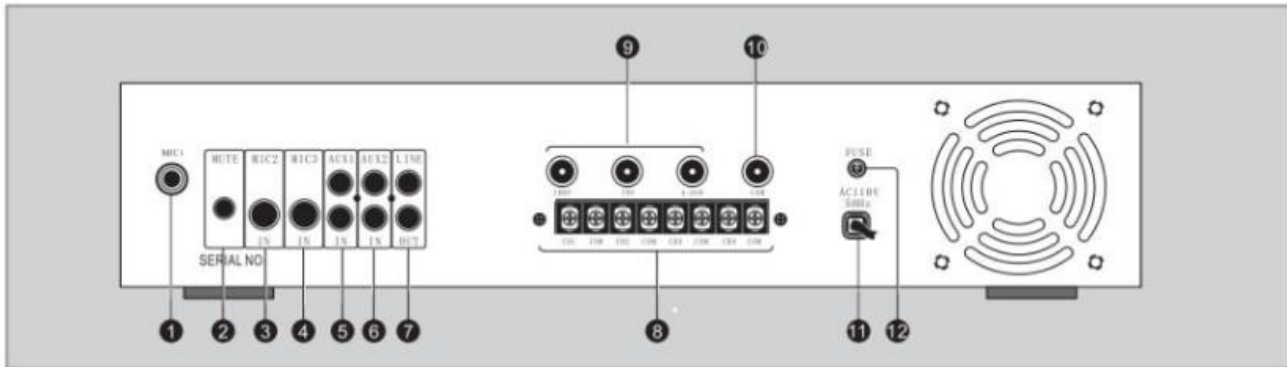

- 1 Mic1 Input 2 Mute Control 3 Mic2 Input 4 Mic3 Input 5 Aux1 Input 6 Aux2 Input 7 LineOut
- 8 ZONE OUTPUT 9 Output Terminals 10 COM 11 AC Power Line 12 FUSE

Model	LPA-60TF	LPA-100TF	LPA-150TF	LPA-200TF	LPA-280TF
Line Voltage	70-100V	70-100V	70-100V	70-100V	70-100V
Impedance	4-160hm	4-160hm	4-160hm	4-160hm	4-160hm
Rated Power	60W	100W	150W	200W	280W
Zone	4	4	4	4	4
Dimension MM	485*360*90	485*360*90	485*360*90	485*360*90	485*395*90
Weight KG	7.5	8.56	9.5	10.5	12.2
Gross Weight KG	8.5	9.56	10.5	11.66	13.36
Model	LPA-380TF	LPA-480TF	LPA680TF	LPA-880TF	LPA-1000TF
Line Voltage	70-100V	70-100V	70-100V	70-100V	70-100V
Impedance	4-160hm	4-160hm	4-160hm	4-160hm	4-160hm
Rated Power	380W	480W	680W	880W	1000W
Zone	4	4	4	4	4
Dimension MM)	485*395*90	485*445*90	485*445*90	485*445*90	485*445*90
Weight KG	12.84	16	17.23	17.58	19.58
Gross Weight KG	14	17.38	18.61	18.96	20.96

Sound Master

www.soundmaster-es.com



Product Description

Model	LPA-60F	LPA-100F	LPA-150F	LPA-200F	LPA-280F
Line Voltage	70-100V	70-100V	70-100V	70-100V	70-100V
Impedance	4-160hm	4-160hm	4-160hm	4-160hm	4-160hm
Rated Power	60W	100W	150W	200W	280W
Dimension (MM)	485*360*90	485*360*90	485*360*90	485*360*90	485*395*90
Weight (KG)	7.5	8.56	9.5	10.5	12.2
Gross Weight (KG)	8.5	9.56	10.5	11.66	13.36
Model	LPA-380F	LPA-480F	LPA680F	LPA-880F	LPA-1000F
Line Voltage	70-100V	70-100V	70-100V	70-100V	70-100V
Impedance	4-160hm	4-160hm	4-160hm	4-160hm	4-160hm
Rated Power	380W	480W	680W	880W	1000W
Dimension (MM)	485*395*90	485*445*90	485*445*90	485*445*90	485*445*90
Weight (KG)	12.84	16	17.23	17.58	19.58
Gross Weight (KG)	14	17.38	18.61	18.96	20.96

Sound Master

www.soundmaster-es.com

Product Show


Product performance description

1,U disk, SD card plug and play, with remote control, Blue tooth receiver module 2.3 microphone inputs, 2 AUX inputs, 1 AUX output 3.100V, 70V constant voltage output and 4-16 ohm constant resistance output 4.5 unit LED indicator light, independent volume control for each channel 5. Sound erasing function, easy to insert emergency broadcast, output short circuit protection and alarm, overheating and saturation distortion warning 6.2U standard chassis design, aluminum alloy panel, beautiful and practical

PA AMPLIFIER

Features:

- 1.USB Plug and Play.
- 2.3*Microphones inputs, 2*Aux Inputs, 1*Aux Output.
- 3.70V.100V Voltage Output and 4-16 Ohms Impedance Output, 5 pieces LED Indicators.
- 4.With erase function, easy to insert emergency broadcasting, With protection for short-circuit, over-heating, over- saturation and distortion.
- 5.With independently sound level for each channel, and with Bass, Treble.

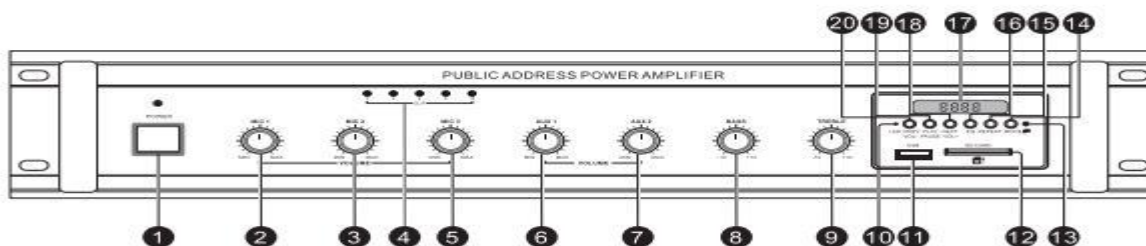


- | | |
|---------------------------------|------------------------------------|
| ① Power On/Off | ⑪ USB Interface |
| ② Sound level for Mic1 | ⑫ SD/MMC Interface |
| ③ Sound level for Mic.2 | ⑬ Remote Control Receiving |
| ④ Signal Indicator | ⑭ USB/SD/MMC/AUX/FM Switching |
| ⑤ Sound level for Mic.3 | ⑮ Mode Setting |
| ⑥ Sound Level for AUX1 | ⑯ EQ Mode |
| ⑦ Sound Level for AUX2 | ⑰ LED Display |
| ⑧ Bass Adjustment | ⑱ Next/Volume Up(Long Press) |
| ⑨ Treble Adjustment | ⑲ Play/Pause |
| ⑩ Bluetooth Receiving Indicator | ⑳ Previous/Volume Down(Long Press) |

Sound Master

www.soundmaster-es.com

Specification:

Model No	LPA-60F	LPA-100F	LPA-150F	LPA-200F	LPA-280F	LPA-380F
Voltage	70-100V	70-100V	70-100V	70-100V	70-100V	70-100V
Impedance	4-16Ω	4-16Ω	4-16Ω	4-16Ω	4-16Ω	4-16Ω
Rated Power	60W	100W	150W	200W	280W	380W
Zone	/	/	/	/	/	/
Size	485*360*90	485*360*90	485*360*90	485*395*90	485*395*90	485*395*90

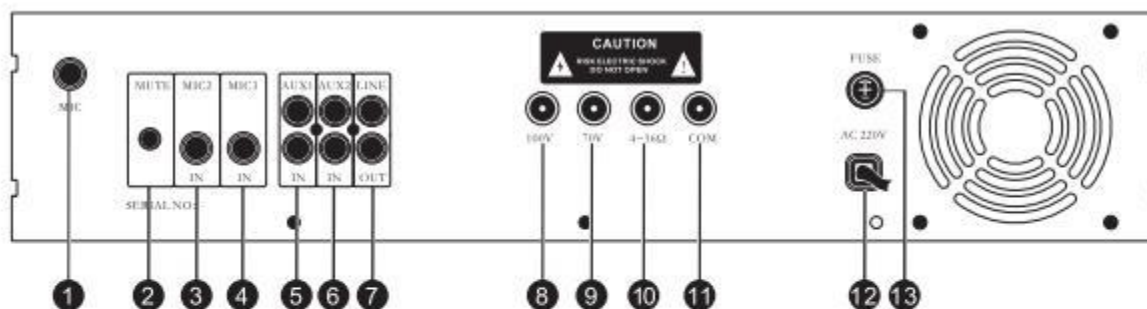

- 1 MIC Input
- 2 Erase Function
- 3 MIC2 Input
- 4 MIC3 Input
- 5 AUX 1
- 6 AUX 2
- 7 LINE Output
- 8 100V Voltage Output Connector
- 9 70V Voltage Output Connector
- 10 4-16Ohms Voltage Output Connector
- 11 Ground Connector
- 12 Power Cord
- 13 Fuse Holder

Product parameters

Product Name	Professional amplifier
Material	ABS+Metal
Function	Play Music/Video
Package	Box/Carton

Sound Master

www.soundmaster-es.com

Model Name	LBG-502
Waterproof	Yes
Speaker Type	In-ceiling Speaker
Type	Passive
Use	HOME THEATRE, Mobile Phone, Karaoke Player, Stage
Power Source	AC
Number of Loudspeaker Enclosure	1
Cabinet Material	Metal
Display Screen	NO
Audio Crossover	TWO-WAY
Woofer Size/Full-Range Size	6"
Set Type	Speaker
Feature	Play Video
Material	Plastic
Communication	AUX, Audio Line
Output Power	15W
Frequency Range	100HZ-20KHZ
Tweeter Size	1"
Channels	2 (2.0)
Special Feature	Wireless, Mini , Wall Mounted PA Speaker , Perfect Sound School, Office
Frequency	Response 90-20KHz
Line voltage	70-100V
Sensitivity	98DB



Sound Master

www.soundmaster-es.com



Industry-specific attributes

Style	Headset Microphone
Communication	Wired
Use	Speaking, Teaching , Speech, Conference, Churchs etc

Other attributes

Model Number	HM-9707
Type	Back Electret Condenser Microphone
Color	black Color
Application	configure to shure / sennhersir / AKG wireless microphone system
Plug	6kinds plugs, could use for kinds brand wireless mic system
Advantage	skin color which more popular and more professional for users
Feature	Mini exquisite and Invisable Beige Color
Directional	Omnidirectional
Usage	Stage Performance, Singing, Speaking, Hosting, Interview, Speech

Packaging and delivery

Package Type:	PP bag , 1 piece weight is about 0.2KG
---------------	--